



Sughrue

SUGHRUE MION ZINN MACPEAK & SEAS, PLLC

2100 Pennsylvania Avenue, NW
Washington, DC 20037-3213
T 202.293.7060
F 202.293.7860

www.sughrue.com

July 5, 2001

BOX PATENT APPLICATION
Commissioner for Patents
Washington, D.C. 20231

Re: Application of Shuuji YANO and Seiji UMEMOTO
REFLECTIVE LIQUID CRYSTAL DISPLAY
Assignee: **NITTO DENKO CORPORATION**
Our Ref. Q65306

Dear Sir:

Attached hereto is the application identified above including thirty-five (35) sheets of the specification, including the claims and abstract, two (2) sheets of drawings, executed Assignment and PTO 1595 form, and executed Declaration and Power of Attorney.

The Government filing fee is calculated as follows:

Total claims	<u>8</u>	- 20	=	<u> </u>	x	\$18.00	=	<u> </u>	\$0.00
Independent claims	<u>1</u>	- 3	=	<u> </u>	x	\$80.00	=	<u> </u>	\$0.00
Base Fee									\$710.00
TOTAL FILING FEE									\$710.00
Recordation of Assignment									\$40.00
TOTAL FEE									\$750.00

Checks for the statutory filing fee of \$710.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from July 05, 2000 based on Japanese Application No. P. 2000-203944. The priority document will be filed at a later date.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By: *Paula J. Miele* (Reg. 33,102)
Darryl Mexie
Registration No. 23,063

Dm/plr/tmm

07/05/01
1051 U.S. PTO

07/05/01
1051 U.S. PTO
09808/06

09808060-070501

REFLECTIVE LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001]

This invention relates to a front-light type reflective liquid crystal display (LCD) which is excellent in the using efficiency of light, bright and easy to see.

The present application is based on Japanese Patent Application No. 2000-203944, which is incorporated herein by reference.

2. Description of the Related Art

[0002]

A front-light type reflective LCD is previously known which is provided with a plane light source device of a sidelight type light pipe, which permits visual recognition in the darkness, on a visual recognition side (Unexamined Japanese Patent Publications Nos. Hei. 11-250715 and 11-306829). However, only arrangement of the plane light source device on the side of visual recognition increases interface reflection owing to existence of an air interface and the reflected light overlaps a displayed image on a liquid crystal display (LCD) panel to cause white blooming and reduction in the contrast. In order to obviate such incontinence, another reflective LCD has been proposed which is provided with the plane light source device

through an adhesive layer (Unexamined Japanese Patent Publication No. Hei. 11-326903). However, the conventional reflective LCDs, particularly those having a screen size having 3 inch or more or making color display, have a problem that the brightness is lower at a farther point from the light source, thus producing variations of light and shade.

SUMMARY OF THE INVENTION

[0003]

This invention intends to provide a front-light type reflective liquid crystal display (LCD) which suppresses changes in the luminance in a lighting mode and is excellent in the visual recognition (or visibility) such as contrast and brightness.

[0004]

This invention provides a reflective liquid crystal display (LCD) characterized by comprising a light pipe which emits incident light from an incident side from the other surface of its upper and lower surfaces through a light emitting means formed on the one of them; a plane light source device with a light source arranged on one or more sides of the light pipe; and a liquid crystal display (LCD) panel having a reflective layer, wherein the light emitting side of the plane light source device and the visual recognition side of the LCD panel are bonded to each other through an adhesive layer having a

refractive index lower than that of the light pipe.

[0005]

In accordance with this invention, bonding processing
using the adhesive layer prevents intervention of an air
5 interface

so that the reflective LCD suppresses reflection at the lower
surface of the light pipe so that its reflected light does not
overlap a displayed image on the LCD panel, thus preventing
white blooming and reduction in contrast and hence realizing
good visibility. In addition, using the adhesive layer having
a refractive index lower than that of the light pipe suppresses
variations in the luminance in a lighting mode.

This is based on the investigation of the problem concerning
the conventional technique.

[0006]

Conventionally, it was considered that suppressing
reflection at the bonding interface between the adhesive layer
and the light pipe or/and the LCD panel is profitable to improve
the luminance and hence making a difference in the refractive
index as small as possible is more advantageous to improve the
luminance. However, in this case, the incident light from the
side of the light pipe and its transmission light is apt to
pass through the adhesive layer owing to reduced difference
in the refractive index at the interface and to be incident
on a color filter layer and a polarizer. The incident light
25

is apt to be absorbed. Incidentally, generally, the polarizer absorbs about a half of the incident light. Therefore, owing to the absorption loss, the light transmitted rearward is greatly reduced. Probably, this disadvantageously increases variations in the luminance on a large-sized screen and color screen.

[0007]

On the other hand, in accordance with this invention, the above incident light is apt to reflect totally owing to the difference in the refractive index. In addition, the light with a larger incidence angle to the adhesive layer which is apt to be transmitted rearward is likely to suffer the total reflection. Therefore, the incident light and its transmission is apt to be shut in the light pipe, thereby improving the transmission efficiency to rearward. The light is difficult to be incident on the polarizer, color filter layer, etc.

As a result, the variations in the luminance is reduced so that the uniformity of the luminance on the screen is improved. Thus, a front-light reflective LCD which is excellent in the uniformity and display quality such as contrast.

Features and advantages of the invention will be evident from the following detailed description of the preferred embodiments described in conjunction with the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

Fig. 1 is a sectional view of an embodiment;

Fig. 2 is a sectional view of another embodiment;

Fig. 3 is a view for explaining light emitting means;
and

Fig. 4 is a graph showing luminance distributions.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0008]

The reflective LCD reflective liquid crystal display (LCD) according to this invention includes a light pipe which emits incident light from an incident side from the other surface of its upper and lower surfaces through a light emitting means formed on the one of them; a plane light source device with a light source arranged on one or more sides of the light pipe; and a liquid crystal display (LCD) panel having a reflective layer, wherein the light emitting side of the plane light source device and the visual recognition side of the LCD panel are bonded to each other through an adhesive layer having a refractive index lower than that of the light pipe. An example of the reflective LCD is shown in Figs. 1 and 2. In Figs. 1 and 2, reference numerals 1, 11 denote a light pipe; 2 a light source; 10 a plane light source device; 20 a LCD panel having a reflective layer; and 12 an adhesive layer. Further, symbol

A denotes a light emitting means for the light pipe; 21 a reflective layer; 21a a reflective layer; 21' a reflective layer serving as an electrode; 22 an LCD layer; 23, 23', 23" a cell plate; 24 a polarizer; and 25 a light diffusive layer.

[0009]

The light pipe may be any means in which incident light from an incident side is emitted from the other surface of upper and lower surfaces thereof through a light emitting means formed on the one surface thereof. Generally, as illustrated, the light pipe is a transparent plate having an upper surface, a lower surface opposite thereto, and an incident side of the sides between the upper and lower surfaces. As illustrated, the light pipe may have a uniform thickness type, otherwise may be a wedge type in which the thickness of an opposite side to the incident side is thinner than that of the incident side. Reduction in the opposite end is more convenient from the point of view of weight reduction and improvement in the incidence efficiency of incident light or its transmission light from the incident side.

[0010]

The light emitting means, which is formed on the one of the upper and lower surfaces, generally the upper surface because the LCD is a front-light type of visual recognition through the light pipe, may be any appropriate means representative of the above light incidence characteristic. Preferably, the

light pipe has a configuration in which the incident light from the incident side is effectively emitted from the lower surface with good directivity and no dispersion through the light emitting means on the upper surface, particularly from the point of view of good visibility on the front and its vicinity, as seen from Fig. 3, has a configuration in which where the light incident from the incident side or its transmission light (bold arrow) is emitted from the lower surface, the direction θ indicative of the maximum strength K of the emitted light is within 30° from the normal line H to the reference plane of the lower surface.

[0011]

In view of preventing reduction in the contrast owing to the overlapping between the leakage light on the upper surface and displayed image by the emitted light, the maximum strength of the leakage light from the upper surface in the direction within 30° to the above normal line H is preferably $1/5$ of the above maximum strength K on the lower surface. The leakage light from the upper surface in the above direction is apt to overlap the reflected light through the reflective layer of the emitted light from the lower surface exhibiting the maximum strength K. Where the ratio in the maximum strength of the leakage light on the upper surface to the emitted light on the lower light is large, the strength of the displayed image is easily lowered relatively, and the contrast is easily reduced.

[0012]

From the standpoint of improvement of the display quality such as brightness and contrast in the reflective LCD, the light pipe has a preferable structure in which said θ is within 28
5 °, particularly 25 °, more particularly 20 ° as seen from Fig. 3, in the vertical plane (section on the drawing) to both reference planes of the incident side surface and lower surface. Further, the light pipe is a preferable structure in which assuming the incident side being in a negative direction with respect to the normal line H, the strength L of the leakage light on the upper surface at the same angle as the direction of the maximum strength K is 1/10 or less, particularly 1/15, more particularly 1/20. Since the pertinent leakage light overlaps the direction of direct reflection of the light exhibiting the maximum strength K, where the value of L/K is large, the strength of the displayed image is relatively lowered to reduce the contrast.

[0013]

From the standpoint of attaining the direction of the
20 maximum strength K and characteristic of the maximum strength K/the leakage light strength L, etc., the light emitting means is preferably a light emitting means A having an optical path converting plane A1 opposite to the incident side (origin of the arrow) as seen, particularly having a plurality of asperities,
25 particularly a repetition thereof having the optical path

converting plane A1 with a tilt angle of $35 - 48^\circ$ from the lower reference plane.

[0014]

The repetitive structure of the asperity can be formed of convexities or concavities each having equal sides. From the standpoint of the using efficiency of light and light emission with good directivity from the supper surface in the front (or vertical) direction of the light inverted from the emitted light from the lower surface, the structure of asperities is preferably a repetitive structure in which as seen from Fig. 2, the asperities which are triangular in section, which have the optical path converting planes A1 sloping down from the incident side (origin of arrow) toward the opposite side at the tilt angle from the lower reference plane is $35 - 48^\circ$ (θ_1), are formed with regular pitches, and the flat face 1a with the tilt angle of $0 - 10^\circ$ formed from the upper surface of the light pipe is arranged between the pitches. The light pipe is preferably a repetitive structure of prism-shaped asperities each composed of the optical path converting plane A1 and a long side plane A2 (θ_2) at the tile angle of $0 - 10^\circ$ as seen from Fig. 1.

[0015]

Incidentally, the asperities described above are formed of bumps or depressions. From the standpoint of making the optical path converting plane A1 difficult to crack to improve

disadvantageous in the efficiency of using light.

[0017]

On the other hand, the long side plane A2 or flat plane 1a between the optical path converting planes A1 intends to reflect the incident light to be supplied to the optical path converting plane and also invert the light reflected from the optical path converting plane through the reflective layer of the LCD panel and transmit it from the upper surface, and further intends to reflect the external light in a reflection mode through the reflective layer and transmit the reflected light from the upper surface. In view of such an intension, the tilt angle θ_2 of the long side plane A2

or the angle θ of the flat plane 1a is preferably $0 - 10^\circ$.

[0018]

The tilt angle θ_2 on the long side plane may be 0° (horizontal plane), but preferably exceeds be 0° so that when the transmission light incident to the long side plane is reflected and supplied to the optical path converting plane, the transmission light can be transformed into parallel light and the directivity of the reflected light through the optical path converting plane can be enhanced. This is advantageous for the display. On the other hand, if the tilt angle θ_2 exceeds 10° , the rate of the incidence of light to the long side plane is reduced so that the supply of light to the opposite end is insufficient. Thus, the light emission is apt to become

imbalance. The degree of changing the light path due to refraction increases so that the light amount in the front direction is reduced. This is disadvantageous for the display. Low-profiling of the sectional shape of the light pipe on the opposite end becomes difficult. The amount of light to the light emitting means is reduced, thereby lowering the light emission efficiency.

[0019]

From the standpoint of the above performances such as the focusing of the emitted light, an increase in the light amount in the front direction and suppression of the leakage light based on the conversion of the transmission light into the parallel light, the preferred angle of the long side plane is 8° or less, particularly 5° or less. As described above, by adjusting the tilt angle of the long side plane or flat plane from the optical path converting plane, the emitted light is given directivity so that the light is emitted in the vertical direction or at an angle approximately equal to 90° from the lower surface.

[0020]

From the standpoint of the visibility of the displayed image through the long side plane of the light pipe, the preferable angle difference of the tilt angle θ_2 of the long side plane is within 5° , particularly 4° , more particularly 3° over

the entire light pipe. The difference in the tilt angle θ_2 between the nearest long side planes is within 1° , particularly 0.3° , more particularly 0.1° . This suppresses the influence by the difference in the tilt angle θ_2

5 for the displayed image on the long side plane from which the light permeate. Where the permeating angle greatly differs according to the positions of the long side planes, an unnatural image will be created. Particularly, a great difference of deflection between the permeated images in the vicinity of the adjacent pixels results in a very unnatural displayed image. [0021]

105070.070901
The difference in the tilt angle θ_2 assumes that the tilt angle of the long side plane is within 10° . Specifically, such a small tilt angle θ_2 is set to suppress the deflection of the displayed image due to refraction within a permissible value when the light permeate through the long side plane. This intends to set the observing point in the vicinity of the vertical direction so that the optimum direction of visual recognition in the optimized LCD is not changed. When the displayed image
20 is deflected, the optimum direction of visual recognition deviates from the vicinity of the vertical direction. Where the degree of deflection is great, the direction of deflection approaches the emitting direction of the leakage light from the upper surface of the light pipe so that the displayed image
25 is apt to suffer from the influence such as reduction in the

contrast. The condition that the tilt angle θ_2 of the long side plane is within 10° includes that the influence such as the dispersion of transmitted light is negligible.

[0022]

5 From the standpoint of acquiring a bright displayed image, the incidence efficiency of external light is preferably excellent, and efficiency of transmission and emission of the displayed image by the LCD panel are preferably excellent. In view of this matter, the asperities are preferably formed to provide a prism shape or sectional triangle having the projected area of the long side plane or flat plane on the lower reference plane is preferably five times, particularly ten times, more particularly fifteen times as large as the area of the optical path converting plane. In this way, the major part of the displayed image by the LCD panel can be transmitted through the long side plane or flat plane.

[0023]

20 Additionally, when the displayed image is transmitted by the LCD panel, the displayed image incident to the optical path converting plane is reflected to the incident side and hence is not emitted from the upper surface, or otherwise deflected and emitted in a greatly different direction from the displayed image which has passed the long side plane on the opposite side with respect to the normal line to the lower surface, and so does not almost influence the displayed image

25

passed through the long side plane. Therefore, in order to prevent an unnatural displayed image from being created because of shortage of transmission of the light for display, it is preferred that the area of the pixel overlapping the optical path converting plane is decreased to assure sufficient light transmittance through the long side plane.

[0024]

Generally, in view of the fact that the pixel pitch of the LCD panel is 100 - 300 μm , the optical path converting plane preferably have a length of 40 μm or less on the basis of the projection width on the lower reference plane. As the projected width of the optical path converting plane decreases, a more sophisticated technique is required to form it. Where the apex of the asperity has roundness with a radius of curvature of a prescribed or more value, the scattering effect appears which is apt to be a cause of a disorder of the displayed image. Further, generally, the coherent length of a florescent tube is generally about 20 μm so that reduction in the projected width of the optical path converting plane is likely to deteriorate the display quality owing to diffraction. For this reason, the preferable projection width of the optical path converting plane is 1 - 20 μm , particularly 5 - 15 μm .

[0025]

For the reasons described above, the distance between the optical path converting planes is preferably large. However,

since the optical path converting plane serves as a substantial emitting portion of light from the incident side as described above, if the distance is too large, the illumination during lighting is coarse, thereby providing an unnatural displayed image. In view of those factors, as seen from Fig. 3, the repetitive pitch P of the asperities with the prism-shape or triangular shape in section is preferably $50\text{ }\mu\text{m} - 1.5\text{ mm}$. In this case, the pitch may be constant, or may be irregular like a random pitch or a random or irregular combination of a prescribed number of pitch units.

[0026]

The light emitting means of asperities may interfere with the pixels on the LCD panel to create moiré. The moiré can be prevented by adjusting the pitch of the asperities. As described above, the pitches of the asperities have a preferred range. Therefore, the measure for solving the case where the range of the pitches creates the moiré is problematic. In this invention, the moiré can be preferably prevented in such a manner that the asperities are formed in a state tilted from the reference plane of the incident side so that the asperities can be arranged to cross the pixels. In this case, if the tilt angle is too large, a deflection occurs in the reflection through the optical path converting plane so that a great deflection occurs in the direction of the emitted light. This increases the anisotropy in the light emitting strength in the direction

of light transmission of the light pipe, thus reducing the using efficiency of light. This is apt to be a cause of deteriorating the display quality.

[0027]

5 For the reason described above, the direction of arranging the asperities with respect to the reference plane of the incident side, i.e. the tilt angle of the ridge direction of the asperities is preferably within $\pm 30^\circ$, particularly $\pm 28^\circ$, more particularly $\pm 25^\circ$. Incidentally, the mark \pm means the direction of tilting with respect to the incident side. Where the resolution of the LCD panel is too low enough to create the moiré, or the moiré is negligible, the direction of arranging the asperities is more preferable as it is more parallel to the incident side.

[0028]

105020.000000
10000000.070000
The light pipe can be formed in any shape as described above. Also where it is wedge-shaped, it may be formed in any shape. It can be formed in any suitable plane shape such as a linear face or curved face. The optical path converting plane or prism-shaped asperities which serves as the light emitting means may be also formed in any plane shape such as the linear plane, uneven plane or curved plane. Further, the asperities may be a combination of different shapes as well as different pitches. The asperities may be a series of projections or depressions with a continuous ridge. The asperities may be

intermittent projections or depressions which are discontinuously arranged in a ridge direction at regular intervals.

[0029]

5 The lower surface or incident side of the light pipe should not be limited to a specific shape but may be formed in any shape. Generally, the lower surface is preferred to be as smooth and flat as possible, and the incident side is vertical to such a lower surface. The incident side is desired to be formed in a shape corresponding to the outer periphery of a light source having a shape of e.g. a curved depression so that the efficiency of light incidence can be improved. The structure of the incident side which is communicated with the light source through an introducing portion may be adopted. This introducing portion may be formed in any shape according to the light source.

[0030]

20 The light pipe can be made of any suitable transparent material according to the wavelength range of the light source. For example, in a visible light range, it may be made of transparent resin such as acryl resin, polycarbonate resin, norbornene resin and epoxy resin, or glass. A preferred light pipe is the light pipe with no birefringence or small birefringence.

[0031]

25 The light pipe can be formed by any suitable technique

such as cutting. In view of mass production, preferred methods are a method of pressing thermosetting resin on a mold which can be formed in a prescribed shape under heat, thereby duplicating the shape, a method of filling heated and molten thermoplastic resin or resin made fluid by heat or solvent in the mold which can be formed in a prescribed shape, a method of filling or pouring liquid resin which can be polymerized by heat, ultraviolet rays or radiation.

[0032]

The light pipe may be a laminate of similar or different material members such as a light conductive portion performing light transmission on which a sheet with a light emitting means such as prism-shaped asperities is bonded, but may not be an integral single member of a single kind of material.

[0033]

The thickness of the light pipe can be determined as required according to the sizes of the light pipe and light source according to a using object. The general thickness of the light pipe to manufacture the LCD is 10mm or less, particularly 0.1 - 5mm, more particularly 0.3 - 3mm. From the standpoint of attaining bright display, the more preferred light pipe has a full light transmittance of the incident light in the vertical direction, particularly vertical incident light from the lower surface to the upper surface is 90 %, particularly 92 %, more particularly 95 %, and a haze value of 30 % or less,

particularly 15 % or less, more particularly 10 or less.

[0034]

The plane light source device can be formed in such a manner that the light source 2 is arranged on the incident side of the light pipe 1 or 11 as seen from the figures. The light source may be any suitable light source. Generally, the preferred light source is a linear light source such as a (cold or hot) cathode ray tube, an array body of light-emitting diodes arranged linearly or in plane, or a light source with the means for converting the point light source into a linear light emitting state with constant or indefinite intervals. In view of low power consumption, endurance, etc. the cold cathode ray tube is particularly preferred. The light source(s) can be arranged on the one or two sides of the light pipe.

[0035]

The plane light source device can be provided as an assembly having any suitable assisting means such as a light source holder 3 which encircles the light source in order to guide the light scattered light from the light source 2 to the incident side of the light pipe as required. The light source holder may be generally a resin sheet or metallic foil equipped with high reflectivity metallic thin film. Where the light source holder is bonded to the end of the light pipe through adhesive, the light emitting means can be omitted at the bonding portion.

[0036]

09898060-070501
1050-090666

1 The reflective LCD panel can be formed by assembling a
LC cell with an electrode serving as a LC shutter and its driving
device, a reflective layer, and other components inclusive of
a polarized plate, a compensating phase shift plate,
5 light-diffused layer which are formed as required. In this
invention, the reflective LCD panel should not be particularly
limited as long as it has the reflective layer, but formed in
an ordinary format as seen from the figures. Incidentally,
the electrode such as a transparent electrode is not illustrated.
[0037]

The LC cell constituting the LCD panel should not be
particularly limited. For example, as regards the orienting
format of LC, it may be a TN LC cell or STN LC cell; a vertical
oriented cell or HAN cell; a twisting system such as an OCB
cell or non-twisting system; or a guest-host system or
ferromagnetic LC system. As regards the LC driving system,
it should not be particularly limited, but may be any driving
system such as an active matrix system or passive matrix system.
Further, as regards the cell plate and electrode, they may not
10 be a transparent plate or transparent electrode in the area
where illumination light or display light are not required to
pass, but may be an opaque body.
[0038]

25 The reflective LCD panel necessarily requires a
reflective layer to be arranged. However, its arranging

position can be determined optionally. For example, it may be provided outside the LC cell like the reflective layer 21 as illustrated in Fig. 1. It may be provided inside the LC cell like the reflective layer 21' as illustrated in Fig. 2. The reflective layer can be formed as an applied layer containing high reflectivity metallic powder of e.g. Al, Ag, Au, Co, Cr, etc., in binder resin; a metallic thin film deposited by evaporation; a reflective sheet which supports the applied layer or deposited metallic layer using a substrate; or an ordinary reflective layer such as a metallic foil. As seen from Fig. 2, where the reflective layer 21' is provided inside the LC cell, the reflective layer can serve as an electrode of a high conductivity material such as the above high reflectivity metal. It may be formed as well as the transparent electrode or otherwise may be formed of the transparent electrode.

[0039]

The LCD panel is provided with a polarizer 24 at the one side of both sides as required in order to control the display light as shown in Figs. 1 and 2. The polarizer should not be particularly limited, but may be any suitable material. For example, it may be a polarizing film such as a polyvinyl alcohol film, partial saponified polyvinyl alcohol film, a drawn film of the hydrophilic high polymer film such as ethylene-vinyl acetate copolymer partial saponified film adsorbed with a dichroic material such as iodine or dichroic

dye;

or a polyene orienting film such as dehydrate of polyvinyl alcohol or de-hydrochloric-acid of polyvinylchloride.

[0040]

5 Further, the polarizer may be used which is equipped with a transparent protective layer of a laminate layer of resin applied layer of film on the single or both surfaces of the polarizing film for the purpose of protection such as keeping water-resistance. The polarizer may be used which includes
10 a polarizing layer of LC polymer or LC polymer-containing polymer. The polarizer with high transmittance is preferably used from the standpoint of bright display.

[0041]

15 On the other hand, in order to compensate for dependency of birefringence on the wavelength to improve the visibility, the above compensating phase shift plate is arranged between the polarizer on the visual recognition side or/and rear side and the LC cell. The compensating phase shift plate may be any suitable plate such as a drawn film of various kinds of
20 resin, that including an oriented layer of LC polymer, or that made of inorganic crystal according to the phase shift characteristic. The compensating phase shift plate may be a superposed layer composed of one or two or more phase shift layers. The above drawn film may be that subjected to various
25 kinds of drawing such as

single-axis drawing at a free end or fixed end, two-axis drawing, drawing including molecular orientation in a thickness direction.

[0042]

5 On the other hand, the light diffused layer is provided as required in order to equalize the brightness by the prevention of uneven light and shade and reduction of moiré by mixing an adjacent light ray. The light diffused layer may be any suitable material layer. For example, it may be an applied hardened layer of transparent resin with a low refractive index with transparent particles with a high refractive index dispersed therein; another applied hardened layer of transparent resin with air bubbles dispersed therein; a base material whose surface is swelled by solvent to generate crazing, a transparent resin layer with irregular asperities; or a diffused sheet with such a layer formed on a supporting base material.

[0043]

20 The above irregular asperities can be formed by any suitable technique of a mechanical or/and chemical technique of duplicating a roughed surface shape of a roll or mold on the surface of the base material or an applied layer of transparent resin formed thereon. The above transparent particles may be one or two or more kinds of particles having average particle size of 0.5 to 30 μm such as possibly conductive inorganic particles of silica, alumina, titania, zirconia, tin

oxide, indium oxide, cadmium oxide, antimony oxide, etc. or organic particles such as bridging or non-bridging polymer. The light diffused layer can also be formed on the light pipe as one or more layers at an appropriate position of the LCD display. The light diffused layer is preferably a layer with low diffusivity which does not disturb the displayed image.

[0044]

In the LCD according to this invention, as illustrated, the light emitting side of the plane light source device 10 and the visual recognition side of the LCD panel 20 are bonded to each other through the adhesive layer 12 having a lower refractive index than that of the light pipe 1, 11 constituting the plane light source device so that the incident light form the incident side or its transmission light can be transmitted effectively rearward.

[0045]

From the standpoint of the total reflection efficiency and the incidence efficiency of the external light due to the suppression of interface reflection, the above adhesive layer 12 has preferably a refractive index lower than that of the light pipe by 0.01 or more, particularly 0.02 - 0.2, more particularly 0.05 - 0.15. From the standpoint of actuality of balancing of the refractive index between itself and the light pipe, the adhesive layer having the refractive index of 1.48 or less is preferably combined with the light pipe having

arefractiveindexof1.49ormore. Further, fromthe standpoint
of improvement of the light using efficiency due to the
suppression of optical loss, the adhesive layer has preferably
a full light transmittance of 90 %, particularly 92 %, more
5 particularly 95 % or more. Furthermore, from the standpoint
of suppressing the light transmission loss and visual blooming
of the displayed image, the adhesive layer has preferably a
haze value of 10 % or less, particularly 8 % or less, more
particularly 5 % or less.

[0046]

The thickness of the adhesive layer can be determined
appropriately according to the above characteristic and bonding
force. It is set at generally 10 - 800 μm , particularly 20
- 650 μm , more particularly 30 - 500 μm . Incidentally, any
suitable bonding agent for forming the adhesive layer can be
used. Its kind should not be particularly limited except the
refractive index. The adhesive layer can be directly formed
on the light pipe or plane light source device during bonding
such as the manner of applying. From the standpoint of simplicity
20 of working, the bonding sheet such as an adhesive sheet, gel
sheet, etc. can be preferably used.

[0047]

The visual recognition of the reflective index LCD
according to this invention is carried out through the plane
25 light source device arranged at the front, particularly the

transmission light from the light side plane or flat plane of
the light pipe as described above. Incidentally, where the
reflective layer 21' is provided inside the LC cell as shown
in Fig. 2, the light having been emitted from the lower surface
of the light pipe 1 in a lighting mode of the plane light source
device is reflected by the reflective layer 21' via the polarizer
24 and LC layer 22 and further reaches the light pipe 1 via
the LC layer and polarizer again. Th display light which has
passed through the long side plane A2 is visually recognized.
In this case, the strong leakage light is emitted in a direction
largely tilted from the front direction which is vertical to
the LCD panel, and the leakage light emitting in the front
direction is weak so that the displayed image with excellent
quality can be visually recognized in the vicinity of the front
direction.

[0048]

On the other hand, in the case of the mode of the external
light in which the plane light source device is not lit, the
light incident from the long side plane A2 on the upper surface
of the light pipe 1 passes through the polarizer, LC layer,
reflective layer, etc. and reaches the conductive plate 1.
The displayed image which has passed through the long side
plane can be visually recognized in the vicinity of the front
direction in a state with excellent display quality such as
less disorder due to the light pipe. Incidentally, the plane

light source device can be turned on or off in an appropriate manner.

[0049]

In this invention, the optical elements or components such as the polarizer constituting the LCD panel may be entirely or partially fixedly stacked/integrated, or may be arranged in a supportable state. From the standpoint of preventing reduction in the contrast by the suppression of interface reflection, they are preferably in the fixed state. For the fixing/sticking processing, any appropriate transparent bonding agent such as an adhesive can be used. The transparent adhesive layer may contain the transparent particle described above to provide an adhesive layer having a diffusing function. When the reflective LCD is formed, an appropriate optical element such as an antiglare layer and an antireflective film other than those described above can be arranged as required.

[0050]

Embodiments

Embodiment 1

The one side surface of a polymethylmethacrylate machined in a prescribed shape (refractive index of 1.50) was cut using a diamond bite to provide a light pipe having a light emitting means. The light pipe has a width of 60 mm, depth of 80 mm,

Its edge is fixed by upper and lower adhesive tape at the upper and lower end of the light pipe to provide a plane light source device. Thus, a front light reflective LCD was acquired. Incidentally, the above plane light source device can be switched on/off by turning on/off a power source. The reflective LCD panel has a polarizer on the visual recognition side but does not have a color filter.

[0052]

Comparative Example

The reflective LCD defined in the first embodiment was acquired with the exception of the adhesive bonding sheet having a refractive index of 1.53 (thickness of 300 μm , transmittance of 92 % and haze value of 5 %).

[0053]

Evaluation Test

In the reflective LCD in a white state which were provided in the first embodiment and comparative example, the plane light source was placed in the lighting mode. In this mode, the distribution of the front luminance in the depth direction on the visual recognition face at the center in the width direction of the light pipe was tested for both samples using a luminance meter (available from TOPCON Co. Ltd as BM-7). The test result is shown in Fig. 4. The front luminance at the center of the screen was 55 cd/m^2 in the first embodiment and 45 cd/cm^2 in the comparative example. It can be seen from Fig. 4 that in

the first embodiment 1 in comparison to the comparative example, the luminance has uniformity with less variation on the display screen. In the external light mode, the display is not different between both samples.

5 [0054]

Since the reflective LCD panel used in the above test has the polarizer on the visual recognition side but the color filter layer, reduction in the luminance at a farther position from the light source in the comparative example is probably attributable to the absorption loss by the polarizer. Where the reflective LCD has the color filter layer, the above reduction in the luminance is probably further amplified. Therefore, the difference in the luminance between the comparative example and this invention is probably further increased. Thus, in accordance with the embodiment of this invention, the front-light reflective LCD with good display quality can be provided which is bright on a large-scale screen and excellent in the uniformity.

Although the invention has been described in its preferred
20 form with a certain degree of particularity, it is understood that the present disclosure of the preferred form can be changed in the details of construction and in the combination and arrangement of parts without departing from the spirit and the scope of the invention as hereinafter claimed.

25

WHAT IS CLAIMED IS:

1. A reflective liquid crystal display comprising:
a light pipe which emits incident light from an incident
side from the other surface of its upper and lower surfaces
5 through a light emitting means formed on the one of them;
a plane light source device with a light source arranged
on one or more sides of the light pipe; and
a liquid crystal display panel having a reflective layer,
wherein the light emitting side of the plane light source device
and the visual recognition side of said LCD panel are bonded
to each other through an adhesive layer having a refractive
index lower than that of said light pipe.

2. A reflective LCD according to claim 1, wherein the
refractive index of said light pipe is 1.49 or more and that
of said adhesive layer is 1.48 or less.

3. A reflective LCD according to claim 1, wherein said
adhesive layer has a full light transmittance of 90 % or more.

4. A reflective LCD according to claim 1, wherein said
adhesive layer has a haze value of 10 % or less.

5. A reflective LCD according to claim 1, wherein said
25 light pipe has a light emitting means on the upper surface,

and in a vertical plane to both reference planes of the lower surface and incident side, an emitting light from the lower surface has a maximum strength in a direction within 30° from a normal line to the reference plane of the lower surface.

6. A reflective LCD according to claim 1, wherein said light pipe has a light emitting means on the upper surface, and said light emitting means is composed of a plurality of asperities triangular in section each of which has an optical path converting plane with a tilt angle of $35 - 48^\circ$ from the reference plane of the lower surface.

7. A reflective LCD according to claim 1, wherein said light pipe has a light emitting means on the upper surface, and said light emitting means is a repetitive structure of prism-like asperities arranged at pitches of $50\ \mu\text{m} - 1.5\ \text{mm}$, each asperity composed of an optical path converting plane and a long side plane, said optical path converting plane is a slope which tilts down at angle of $35 - 48^\circ$ from the reference plane of the lower surface from the incident side toward its opposite end and has a projected width on the reference plane of $40\ \mu\text{m}$ or less and said long side plane is a slope which tilts at an angle of $0 - 10^\circ$ from the reference plane, and has a projected width on the reference plane which is five or more times as long as that of the optical path converting plane, a difference in

angle over all long sides being within a range of 5 ° and a difference in angle to the nearest long side being within 1°.

8. A reflective LCD according to claim 6, wherein said
5 asperities constituting of the light emitting means of the light pipe have ridges which are within a range of $\pm 30^\circ$ from the reference plane of the incident side.

105070.09086860

ABSTRACT OF THE DISCLOSURE

A reflective liquid crystal display (LCD) is constituted by a light pipe which emits incident light from an incident side from the other surface of its upper and lower surfaces through light emitting means formed on the one of them, a plane light source device with a light source arranged on one or more sides of the light pipe, and a liquid crystal display (LCD) panel having a reflective layer. The light emitting side of the plane light source device and the visual recognition side of the LCD panel are bonded to each other through an adhesive layer having a refractive index lower than that of the light pipe.

105070-0908660

FIG. 1

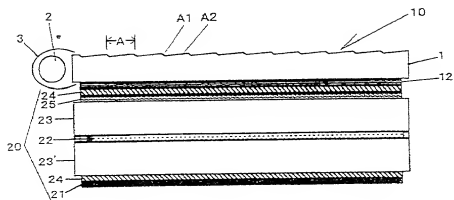


FIG. 2

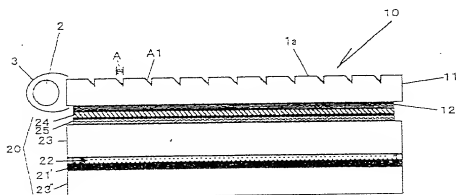


FIG. 3





FIG. 4

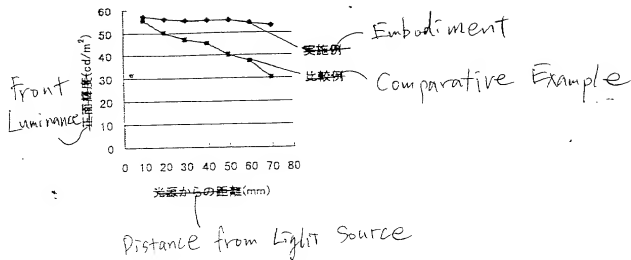

03898060 070504 1050/0 03898060

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

REFLECTIVE LIQUID CRYSTAL DISPLAY

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which is material to the patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

P. 2000-203944

Japan

5/ July/ 2000

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

I hereby claim the benefits under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

I hereby claim the benefits under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

I hereby appoint John H. Mion, Reg. No. 18,879; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olcay, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,202; David J. Cushing, Reg. No. 25,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; Brett S. Sylvester, Reg. No. 32,765 and Robert M. Masters, Reg. No. 35,603; my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to SUCHRUE, MION, ZINN, MACPEAK & SEAS, PLLC, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that the statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Date June 27, 2001

First Inventor

Shuuji

Yano

First Name

Last Name

Residence Osaka,

Signature

Shuuji

Yano

Japan

Post Office Address c/o Nitto Denko Corporation,

Citizenship Japan

1-2, Shimohozumi 1-chome, Ibaraki-shi,
Osaka, Japan

Date June 27, 2001

Second Inventor

Seiji

Umemoto

First Name

Last Name

Residence Osaka,

Signature

Seiji

Umemoto

Japan

Post Office Address c/o Nitto Denko Corporation,

Citizenship Japan

1-2, Shimohozumi 1-chome, Ibaraki-shi,
Osaka, Japan